
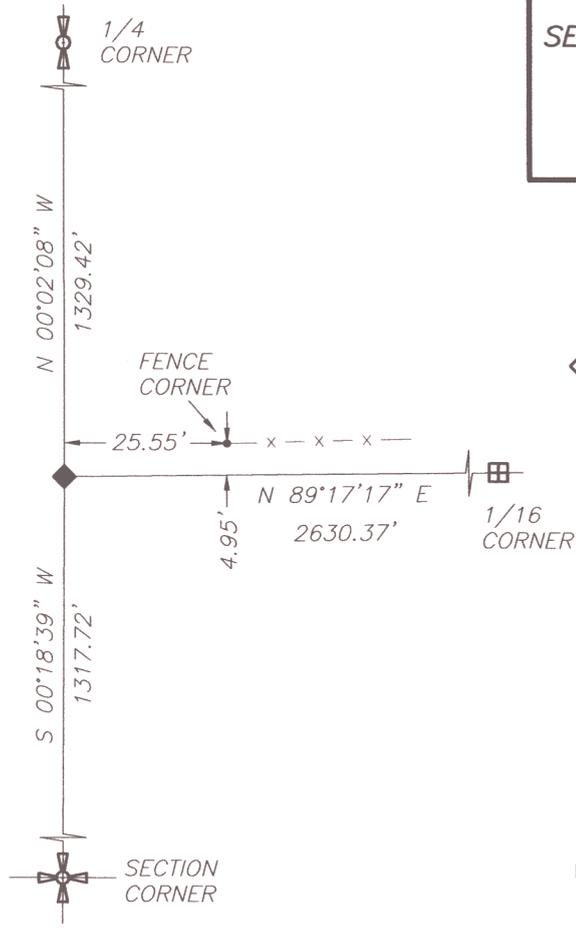


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R1W

SEC 17 — SEC 16
S1/16
U.S.B.&M.



SCALE: 1"=30'



NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT: 40°20'35.62573"N AND LONG: 109°59'30.14134"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND MONUMENT SPIKE AT S1/16 CORNER BETWEEN SECTIONS 16 AND 17 WITH ORIGINAL MARKED STONE SET ALONG SIDE.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REPLACED SPIKE WITH 5/8" X 24" REBAR AND PLASTIC CAP.

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7315205.115
E: 2055166.444

LATITUDE: 40°23'33.525"N

LONGITUDE: 110°00'39.241"W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0010W0_300420

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

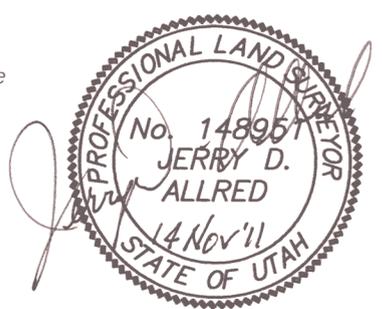

SCANNED 14 Nov 2011