



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R1W  
 C 1/4  
 +  
 SEC 33  
 U.S.B.&M.

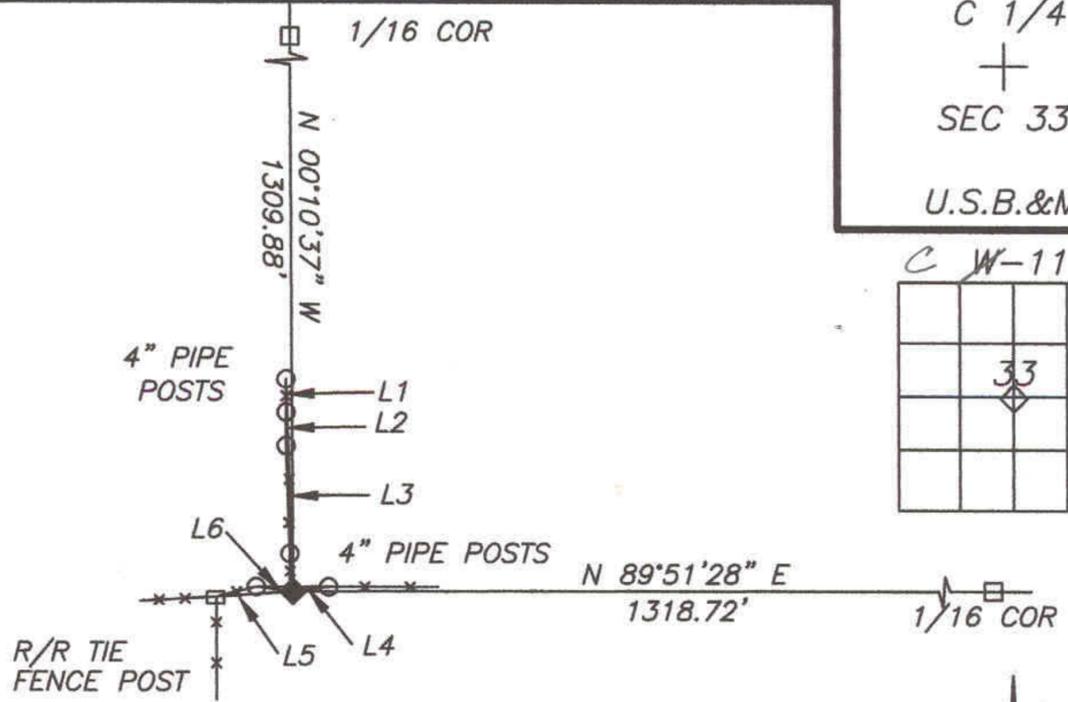

NOTE:  
 TIES L1 THRU L4 AND L6 ARE TO  
 THE CENTER OF 4" PIPE POSTS IN  
 FENCE. L5 IS TO A R/R TIE FENCE  
 POST.

NUMBER	DIRECTION	DISTANCE
L1	N 01°45'59" W	27.93'
L2	N 02°07'06" W	23.59'
L3	N 02°31'03" W	19.19'
L4	N 82°40'03" E	4.74'
L5	S 86°01'23" W	10.06'
L6	N 82°33'30" W	4.85'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL MARKED STONE AT THREE-WAY FENCE CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8" x 24" REBAR WITH BRASS CAP, STAMPED LS 148951 FOR CORNER, WITH STONE ALONGSIDE

(REFERENCED AS SHOWN)

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Licensed Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 25 Feb 2000

Jerry D. Allred 148951  
 Signature of Surveyor License No.