DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W

SEC 21	SEC 22
SEC 28	SEC 27

U.S.B.&M.

J-13

LINE	BEARING	DISTANCE
L1	N 35°10'46" E	56.01'
L2	N 46°32'48" E	44.75'
L3	S 50°57'35" E	42.62'
L4	S 49°06'58" E	38.24'
L5	S 39°57'14" E	49.25'
L6	S 22°41'34" W	74.07'
L7	S 26°51'35" W	63.08'
L8	S 28°48'10" W	47.16'
L9	S 35°48'58" W	49.36'
L10	S 44°52'38" W	46.86'
L11	S 51°56'41" W	47.01'
L12	S 59°17'46" W	56.04'
L13	N 77°43'06" W	30.49'
L14	N 44°22'20" W	40.41'

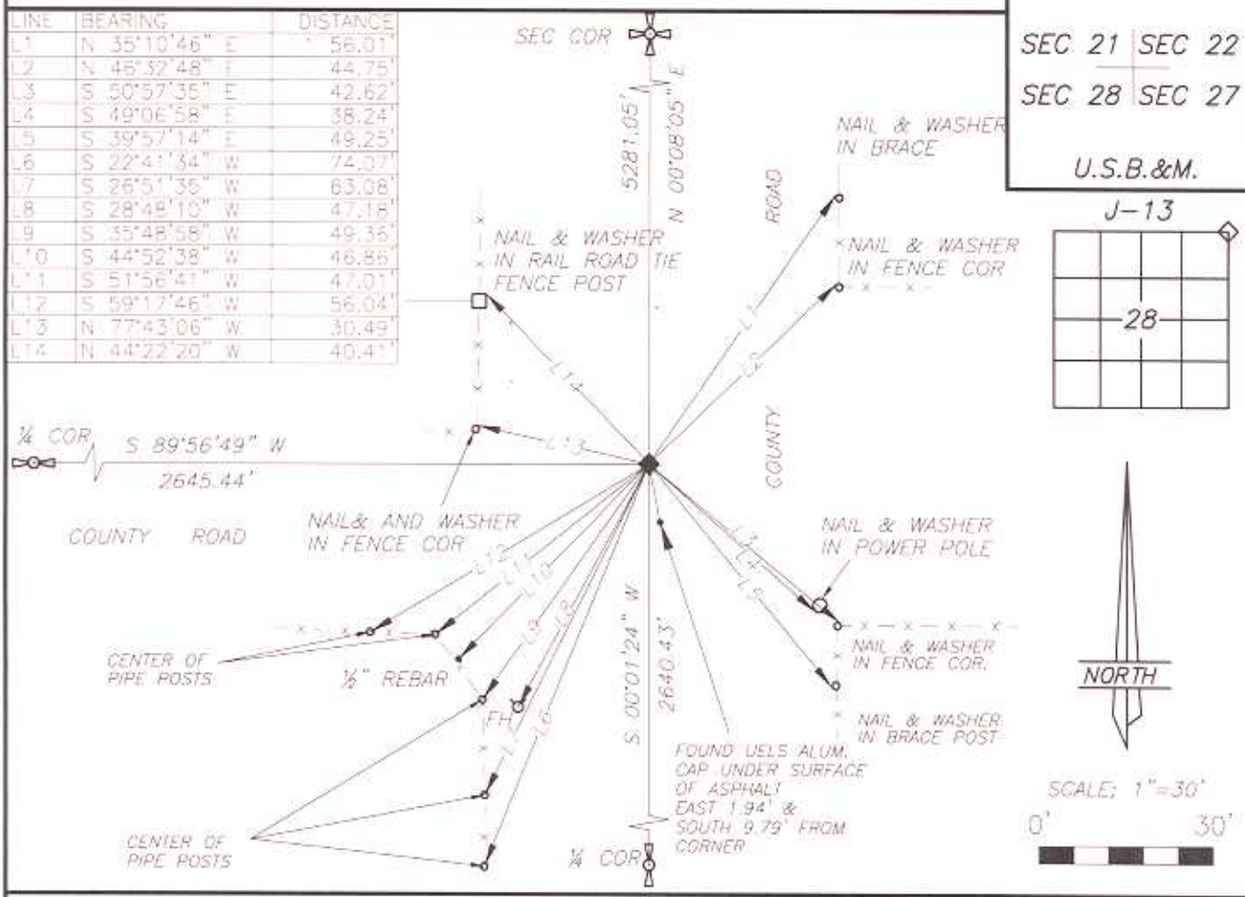

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A MONUMENT SPIKE AS PER PREVIOUS SURVEY AND ALSO FOUND A UELS ALUMINUM CAP WITH REBAR, 1.94' EAST AND 9.79' SOUTH OF POSITION OF THE MONUMENT SPIKE. AFTER DISCUSSING THE POSITION WITH MR. KAY AND MR. MARSHAL (UELS), IT WAS DETERMINED THAT THE MONUMENT SPIKE, WHICH HAD BEEN ESTABLISHED APPROXIMATELY 20 YEARS PRIOR TO THE ALUMINUM CAP LOCATION, WOULD BE HELD AS THE LOCATION OF THE SECTION CORNER.

NOTE:

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (¼ CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET DUCHESNE COUNTY ALUMINUM MONUMENT FLUSH WITH ASPHALT SURFACE OF COUNTY ROAD AND REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)

NAD 83 UTAH CENTRAL ZONE

N:7307485.599
E:1997480.575

LATITUDE: 40°22'26.077" N

LONGITUDE: 110°13'06.167" W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 400300

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

PROFESSIONAL LAND SURVEYOR No. 148951 JERRY D. ALLRED STATE OF UTAH

SCANNED