

# DUCHEсне COUNTY MONUMENT SURVEY RECORD

T1S R5W



N1/16

SEC 13

U.S.B.&M.

LINE	BEARING	DISTANCE
L1	N 11°16'15" E	36.11'
L2	N 50°23'32" E	31.25'
L3	S 62°14'50" E	62.40'
L4	S 17°42'35" W	27.33'
L5	N 57°34'25" W	61.03'
L6	N 18°19'26" W	26.56'

Q-23

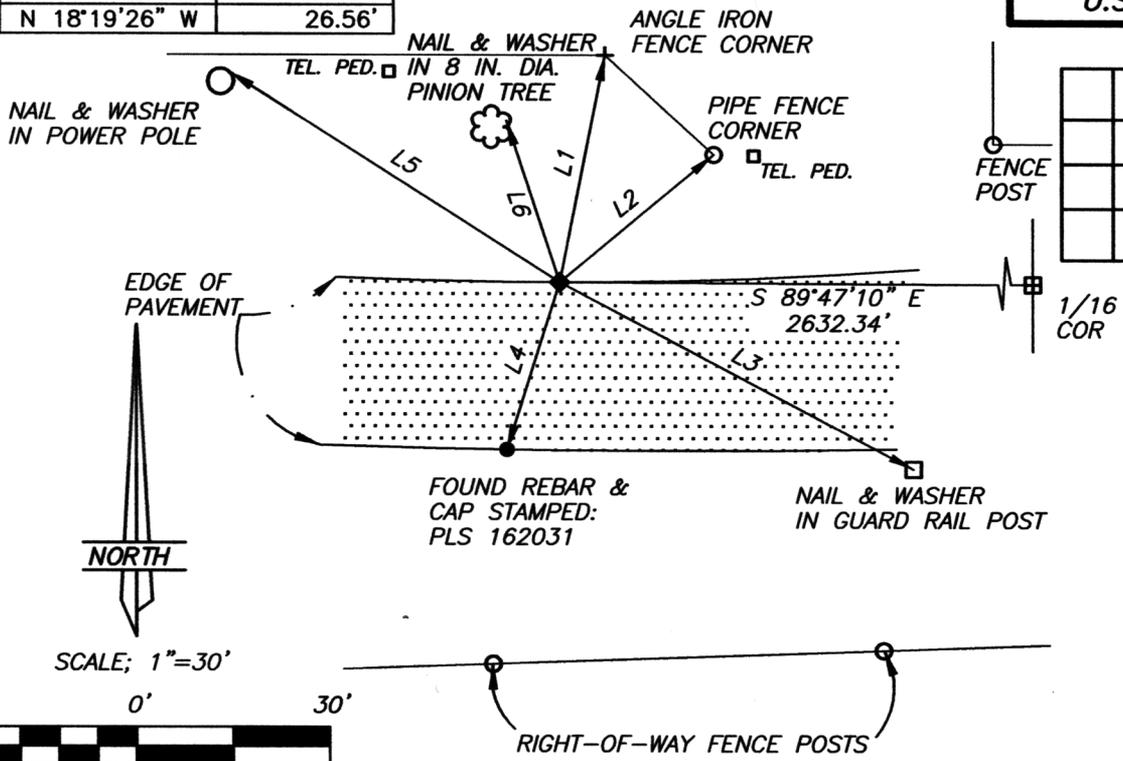

**DESCRIPTION OF CORNER EVIDENCE FOUND**

FOUND MONUMENT SPIKE SET ON PREVIOUS SURVEY

**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER**

(REFERENCED AS SHOWN)

**STATE PLANE COORDINATE DATA**

**CERTIFICATION**

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 9 Dec 2004

Jerry D. Allred, Professional Land Surveyor  
 Certificate No. 148951  
 Duchesne County Surveyor

