
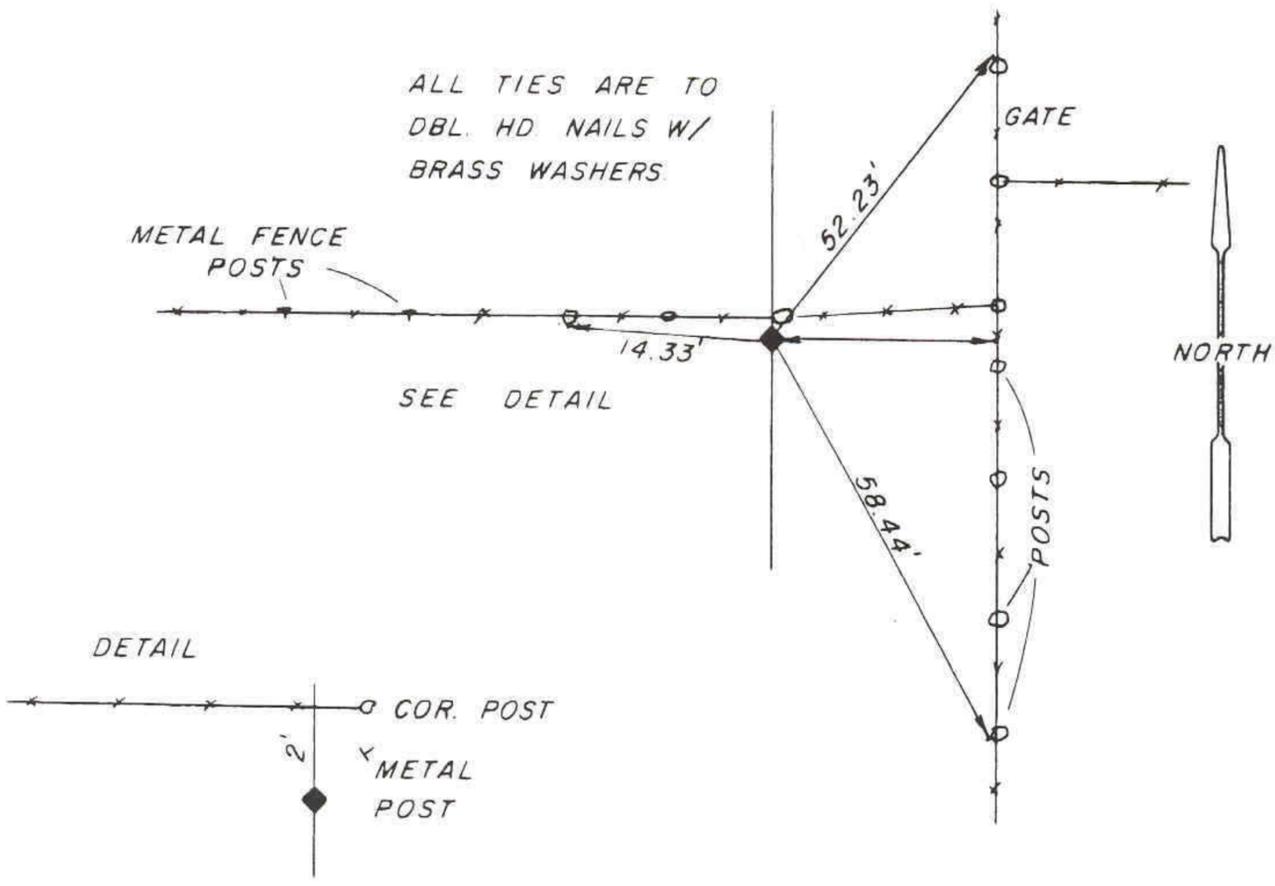


SKETCH SHOWING RELATIVE LOCATION OF MONUMENT AND REFERENCE POINTS.

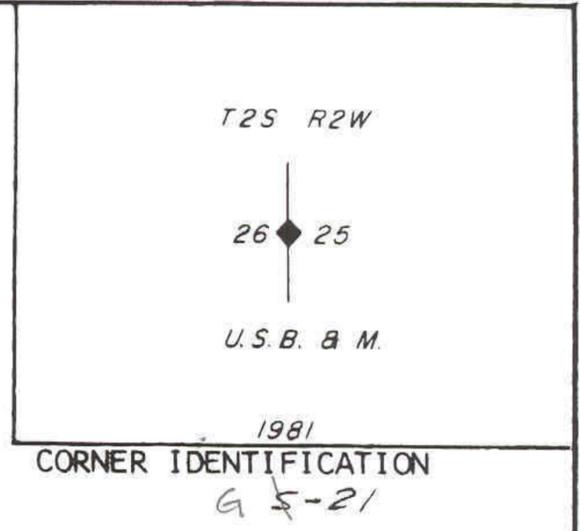

CERTIFICATION

I, JERRY D. ALLRED Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Jerry D. Allred
Signature of Surveyor

3817
Reg. No. 1/15/82

DUCHESNE COUNTY, UTAH

LAND SURVEY MONUMENT RECORD

DESCRIPTION OF CORNER EVIDENCE FOUND AND ORIGINAL RECORD, (if known).

No evidence as to the original location of this corner could be found. Therefore its position East-West was determined by the remnants of two old right-of-way fences which exist from this corner south to the next section corner. These two fences were 4 rods apart, more or less their entire length. The north-south position was determined by proportionate measurement from the S.W. corner of Sec. 25 to the N.W. corner of Sec. 25 as determined by the measurements Mr. Eldon Winterton made from the S.W. corner of Sec. 25 to the N.W. corner of Sec. 24.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER.

Set a 2½" dia. aluminum monument stamped:

DUCHESNE COUNTY SURVEY
T2S R2W
S 26 | S 25
1981

Constructed stone mound around monument.