

DUCHESNE COUNTY MONUMENT SURVEY RECORD




T2S R3W

SEC 3

SEC 10

U.S.B.&M.

V-15

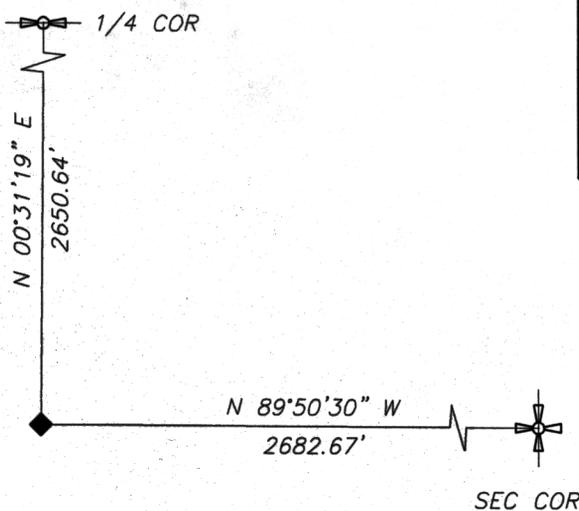

SCALE: 1"=30'
 0' 30'

NOTE:

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (1/4 CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND DUCHESNE COUNTY ALUMINUM CAP

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED MONUMENT INTO VRS CONTROL NETWORK

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)

UTAH CENTRAL ZONE

N:7291616.242
E:2000307.916

LATITUDE: 40°19'48.865" N

LONGITUDE: 110°12'32.598" W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 440600

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

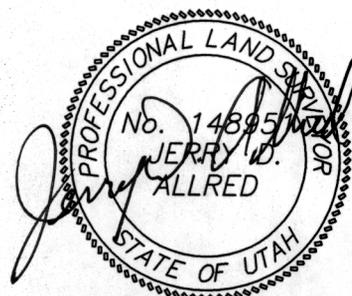



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R3W

1/4 $\frac{S3}{S10}$

U.S.B.&M.

VE-15

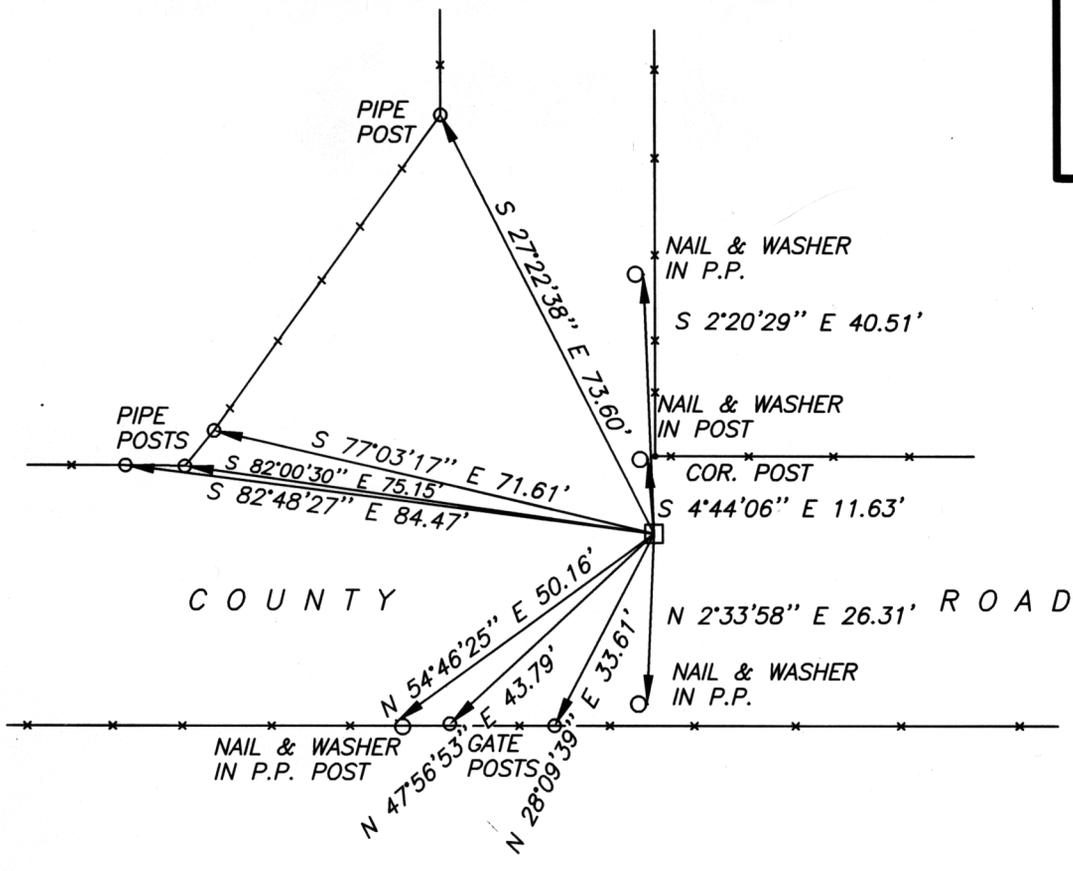

DESCRIPTION OF CORNER EVIDENCE FOUND
 Found 2-1/2" dia. alum. county monument, stamped:

DUCHESNE COUNTY SURVEY
 UNLAWFUL TO DISTRUB
 T2S R3W
 1/4 $\frac{S3}{S10}$
 1985

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
 THE ORIGINAL LOCATION OF THE CORNER

Referenced as shown.

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Licensed Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 1 June '98


Jerry D. Allred LS 148951
 Signature of Surveyor License No.

DUCHESNE COUNTY SURVEY MONUMENT RECORD

SKETCH SHOWING MONUMENTS AND TIES:

T2S,R3W
 3
 1/4 —●— 10
 U.S.B. & M.
 1985

✓ ~~2~~-15

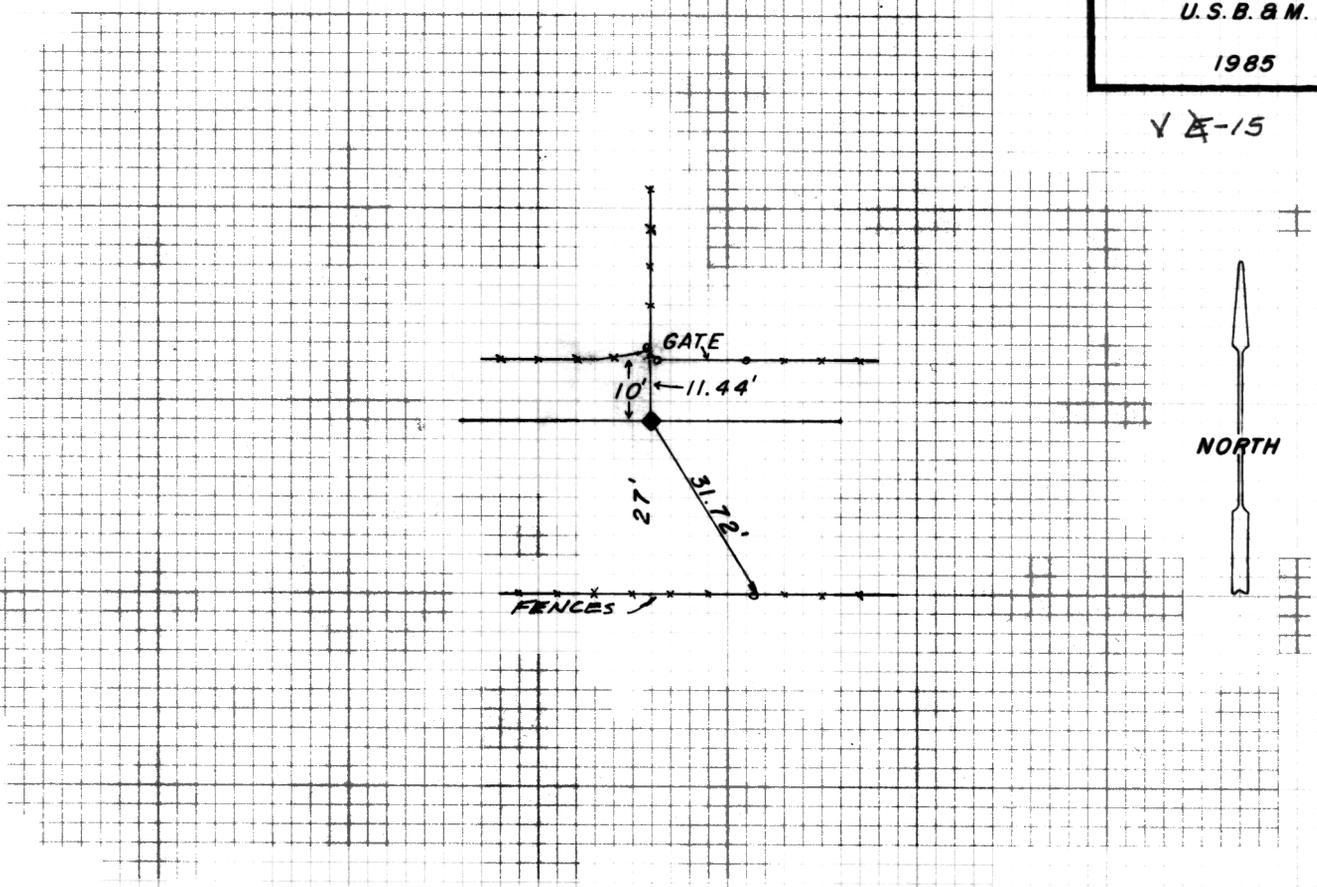

DESCRIPTION OF CORNER EVIDENCE FOUND:

Position of corner determined from evidence of old fence corners and stone monuments found in sections 3 and 10.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER:

Set a 2½" dia. aluminum monument, stamped:

DUCHESNE COUNTY SURVEY
 UNLAWFUL TO DISTURB

T2S R3W

1/4

S | 3

S | 10

1985

STATE PLANE COORDINATE DATA:

CERTIFICATION:

I Jerry D. Allred Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date: 21 Nov. '85

Jerry D. Allred
 Signature of Surveyor

3817
 Reg. No.