

DUCHESNE COUNTY SURVEY MONUMENT RECORD


SKETCH SHOWING MONUMENTS AND TIES:

T 2 S, R 5 W      T 2 S, R 4 W



T 3 S, R 5 W      T 3 S, R 4 W  
U.S.B. & M.  
1914

AX-1

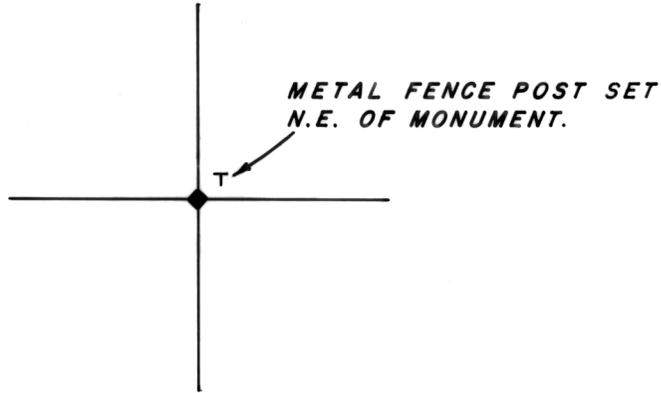

DESCRIPTION OF CORNER EVIDENCE FOUND:  
**FOUND BRASS CAP MONUMENT, STAMPED.**

U.S. GENERAL LAND OFFICE SURVEY  
PENALTY \$250 FOR REMOVAL

T 2 S  
R 5 W | R 4 W  
S 36 | S 31  
S 1 | S 6  
R 5 W | R 4 W  
T 3 S  
1914

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER:  
**NO NEW MONUMENT SET.**

STATE PLANE COORDINATE DATA:

CERTIFICATION:

I JERRY D. ALLRED Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.




Date: 1 DEC '36

Jerry D. Allred  
Signature of Surveyor

3817  
Reg. No.

# DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S  
R5W R4W  
SEC 36 | SEC 31  
SEC 1 | SEC 6  
T3S  
U.S.B.&M.

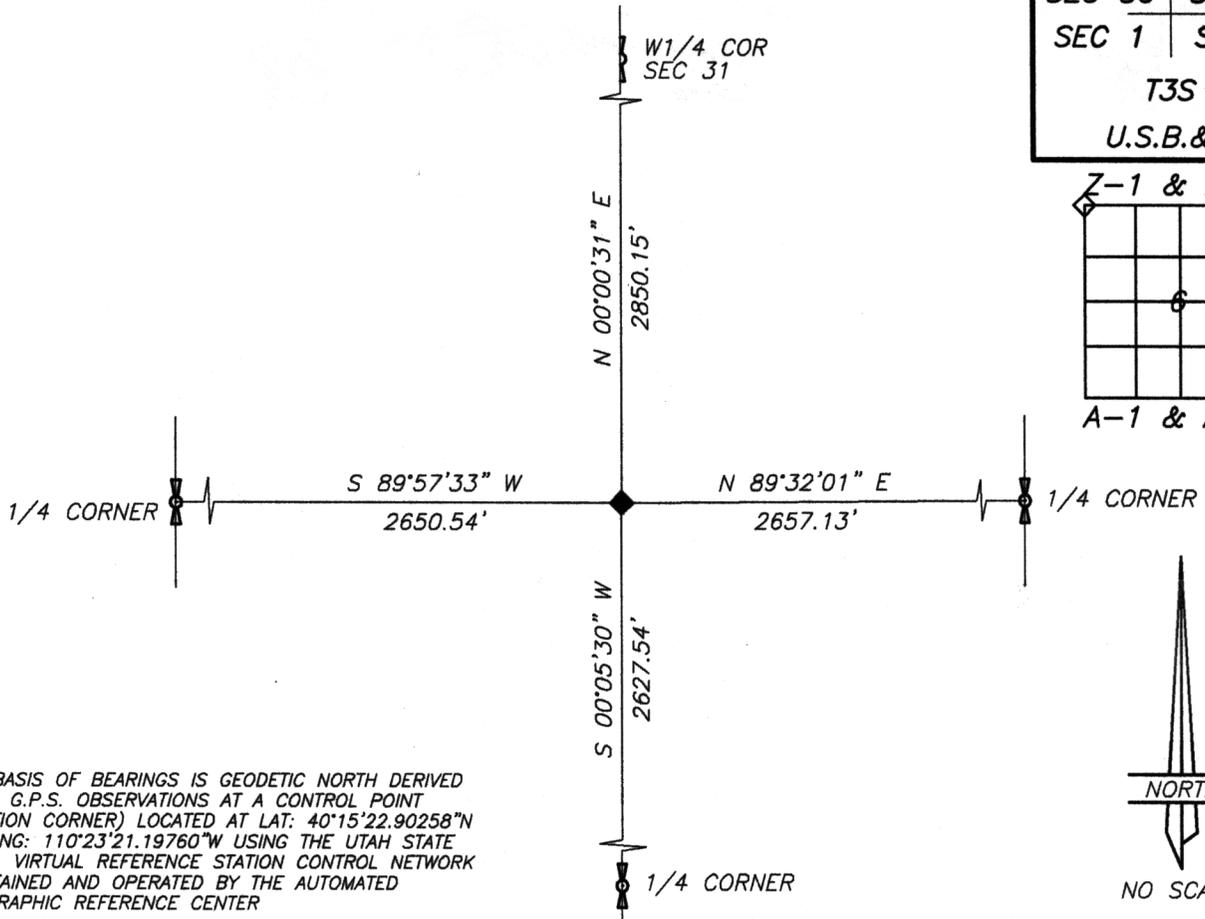

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT: 40°15'22.90258\"/>

**DESCRIPTION OF CORNER EVIDENCE FOUND**

FOUND ORIGINAL G.L.O. BRASS CAP AT SECTION CORNER, STAMPED;



**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER**

REFERENCED AS SHOWN

**STATE PLANE COORDINATE DATA**  
(U.S. SURVEY FEET)  
NAD 83 UTAH CENTRAL ZONE  
N: 7264031.577  
E: 1950417.835

**LATITUDE:** 40°15'22.903\"/>

**CERTIFICATION**

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 15 Nov 2011

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

