


SKETCH SHOWING RELATIVE LOCATION OF MONUMENT AND REFERENCE POINTS.

T2S R5W
1/4
28
33
U.S.B. & M.

1981
CORNER IDENTIFICATION
E 2-11

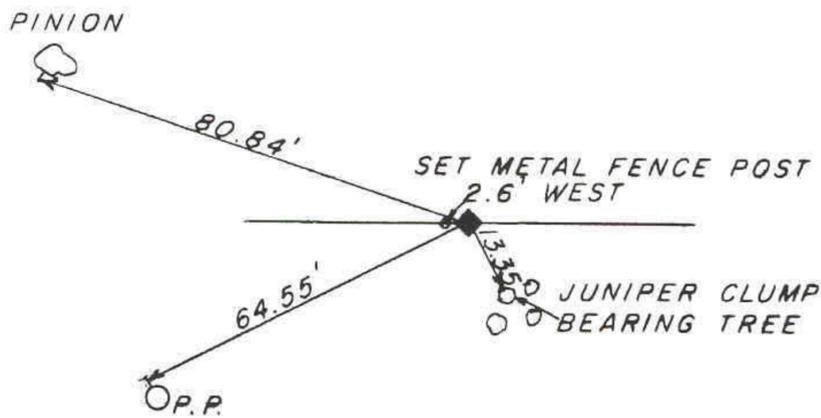

TIES ARE TO
DBL. HD. NAILS
W/ BRASS WASHERS.

CERTIFICATION

I, JERRY D. ALLRED Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Jerry D. Allred
Signature of Surveyor

3817
Reg. No. 13 SEPT '82

DUCHESNE COUNTY, UTAH

LAND SURVEY MONUMENT RECORD

DESCRIPTION OF CORNER EVIDENCE FOUND AND ORIGINAL RECORD, (if known).

Scattered stones and bearing tree used to relocate this corner. The stones were in approx. a 6' dia. circle as if moved in search of the marked stone. The bearing tree was found as per G.L.O. notes. A copperweld monument had been set by a previous survey at the location of the corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER.

Set a 2½" dia. aluminum monument at the position of the copperweld and relocate corner, stamped:

DUCHESNE COUNTY SURVEY
T2S R5W
1/4
28
33
1981

6 Feb 03