

# DUCHESNE COUNTY MONUMENT SURVEY RECORD



T3S R1W

NUMBER	DIRECTION	DISTANCE
L1	N 40°05'51" E	46.68'
L2	N 30°41'27" E	44.36'
L3	N 25°22'50" W	40.82'
L4	N 34°07'47" W	44.18'

SEC 8 | SEC 9  
 SEC 17 | SEC 16

U.S.B.&M.

R-9

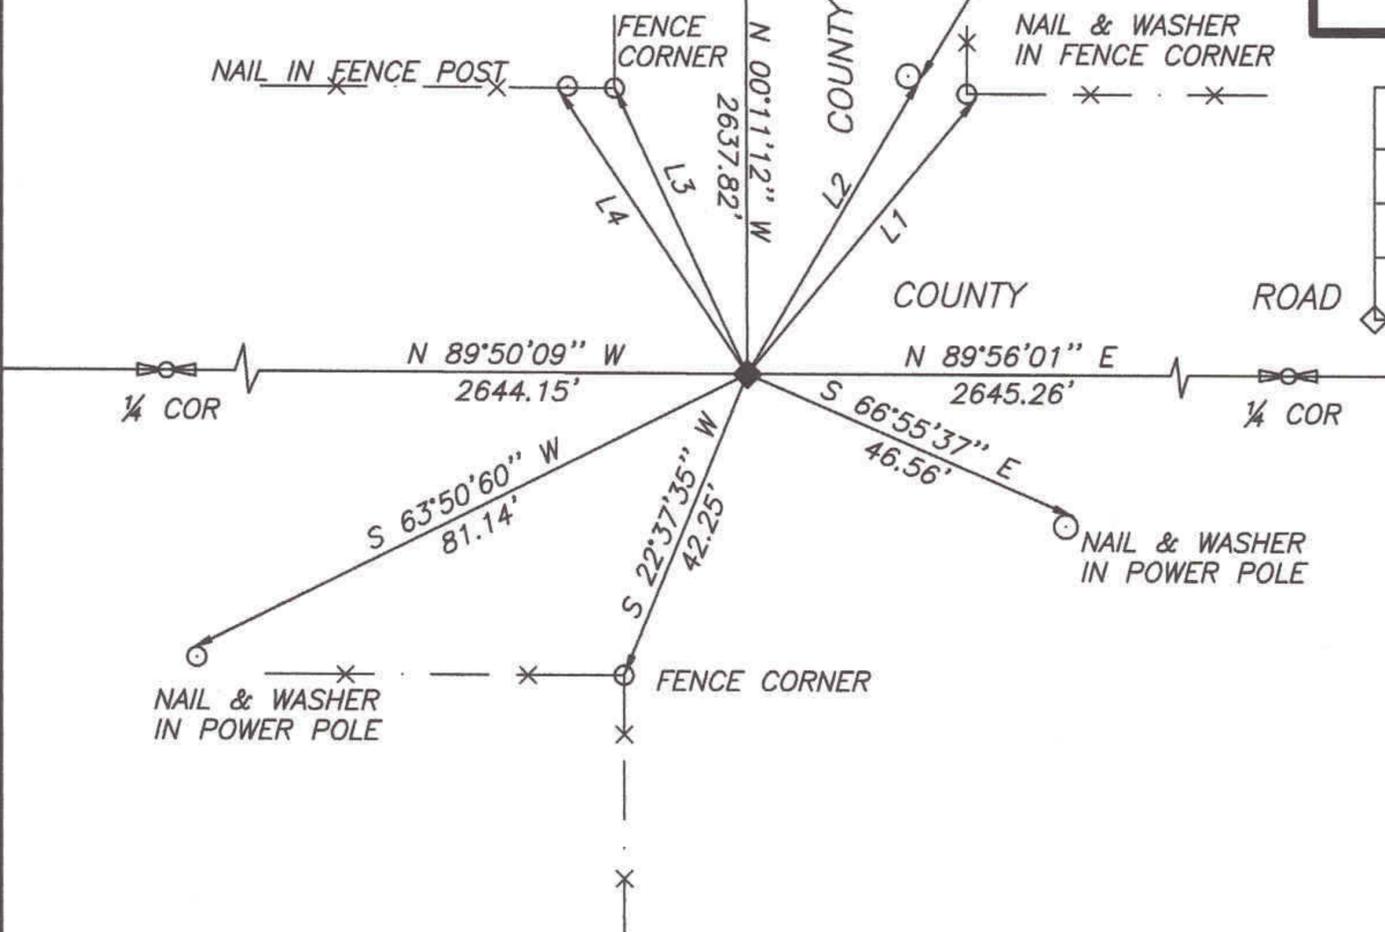

## DESCRIPTION OF CORNER EVIDENCE FOUND

DETECTED 1/2" REBAR SET BY C. S. PEATROSS, UNDER THE SURFACE OF THE ASPHALT, BY USING HIS TIES.

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET MONUMENT SPIKE ON TOP OF THE REBAR, LEVEL WITH THE SURFACE OF THE ASPHALT.

(REFERENCED AS SHOWN)

## STATE PLANE COORDINATE DATA

## CERTIFICATION

26 DEC 2002

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 13 Nov 2002

Jerry D. Allred, Professional Land Surveyor  
 Certificate No. 148951  
 Duchesne County Surveyor

