


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R2W

SEC 28 | SEC 27
 SEC 33 | SEC 34

U.S.B.&M.


E-13



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 26°46'43" W	50.35'
L2	N 27°20'30" E	48.18'
L3	N 40°29'33" E	34.78'
L4	N 47°46'25" E	30.83'
L5	N 80°17'08" E	24.89'
L6	S 22°17'04" E	64.21'

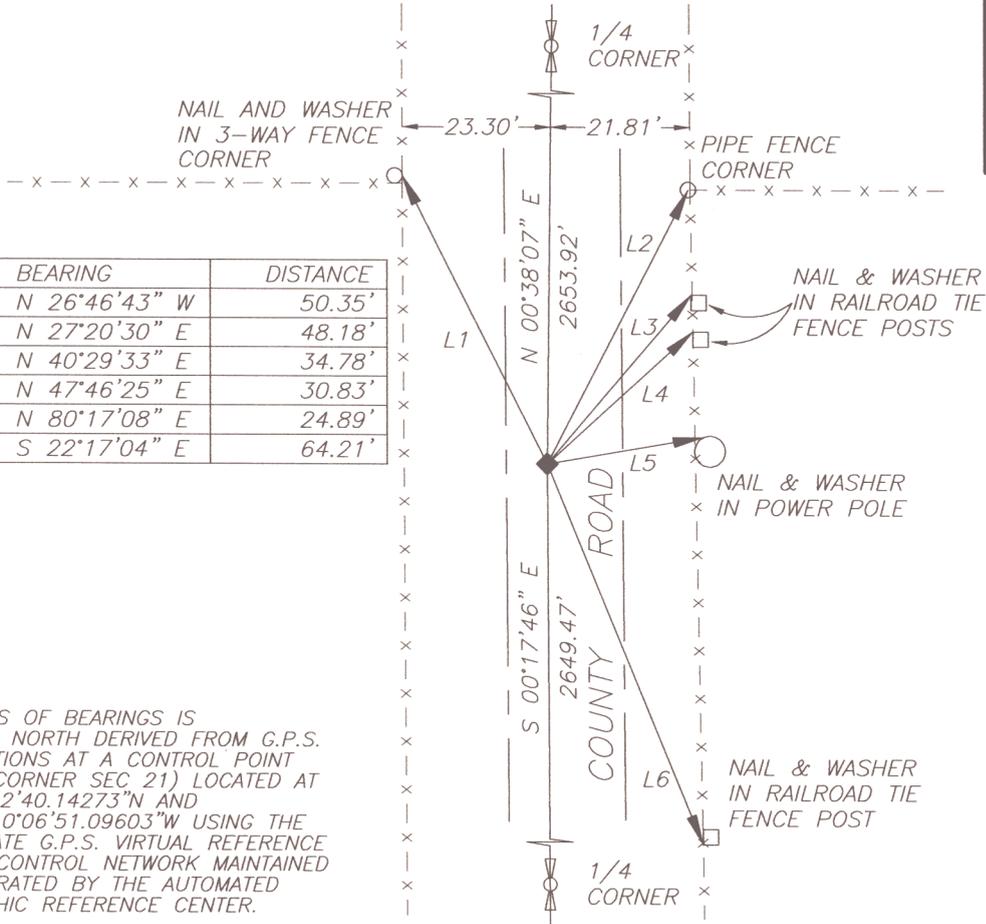

NOTE:
 THE BASIS OF BEARINGS IS
 GEODETIC NORTH DERIVED FROM G.P.S.
 OBSERVATIONS AT A CONTROL POINT
 (N1/16 CORNER SEC 21) LOCATED AT
 LAT: 40°12'40.14273"N AND
 LONG: 110°06'51.09603"W USING THE
 UTAH STATE G.P.S. VIRTUAL REFERENCE
 STATION CONTROL NETWORK MAINTAINED
 AND OPERATED BY THE AUTOMATED
 GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF SECTION CORNER DETERMINED FROM DATA ON OLD STATE HIGHWAY
 RIGHT-OF-WAY PLATS.

**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
 THE ORIGINAL LOCATION OF THE CORNER**

SET SURVEY MARKER & WASHER AT THE POSITION OF THE CORNER.

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
 NAD 83 UTAH CENTRAL ZONE
 N: 7239436.979
 E: 2030165.648

LATITUDE: 40°11'08.824" N

LONGITUDE: 110°06'17.603" W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0020W0_400200

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
 hereby certify that I have performed or reviewed the work done on the
 diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

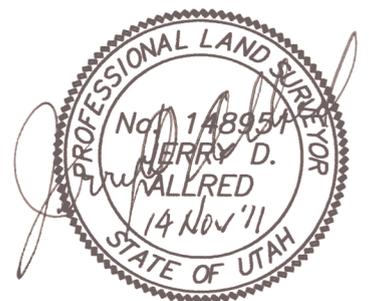

SCANNED 14 Nov 2011